



COBALT SERIES

Dual Stage Turbo Sludge Pump

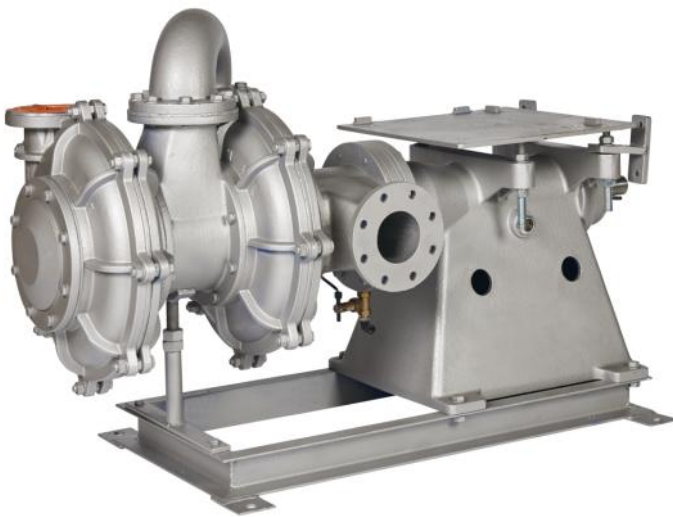

| | |
|--------------------|---------------------------|
| Type: | DSTSP100 |
| Motor Revolution: | 1450 rpm |
| Pump Revolution: | 1950 rpm |
| Pressure: | 14 bar max |
| Flow rate: | 115 m ³ /h max |
| Seal Type: | Mechanical Seal |
| Cooling Type: | Water Cooling |
| Motor Size: | 37 Kw max |
| Protection Class: | IP 65 |
| Suction: | DN100, Pn10 |
| Discharge: | Dn80, Pn10 |
| Casing Material: | Gg22 |
| Impeller Material: | AISI 4140 |
| Impeller Diameter: | Ø290mm (2pcs) |
| Inner Coating: | Rubber 65-70 |
| Weight: | 780 Kg |
| Excitation System: | Hooped |

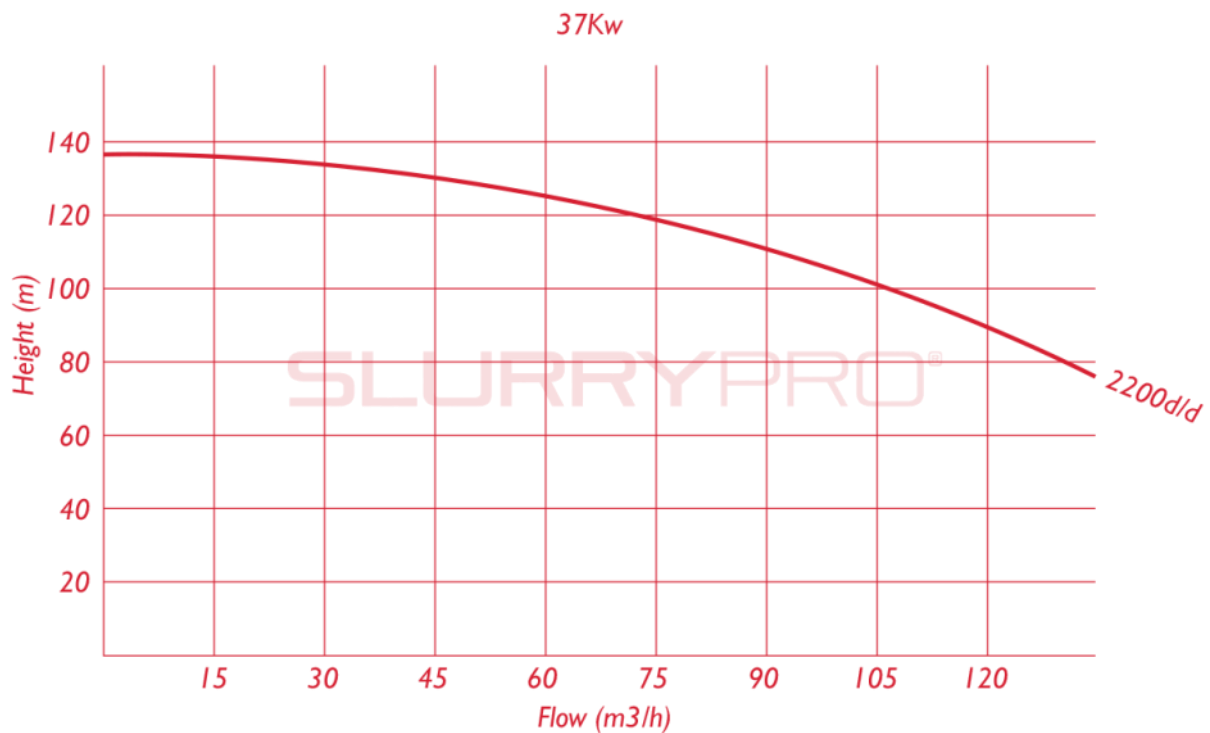

NOTE This information is for guidance / reference only. For application specific drawings and curves, please contact your nearest authorised distributor at slurrypro.com. 03.05.18.